

# KOYO

## **INSERTLAGERS**




# INSERTLAGERS



## Cilindrische boring (asborging d.m.v. borgschroeven)

**d 10 - 26.98 mm**

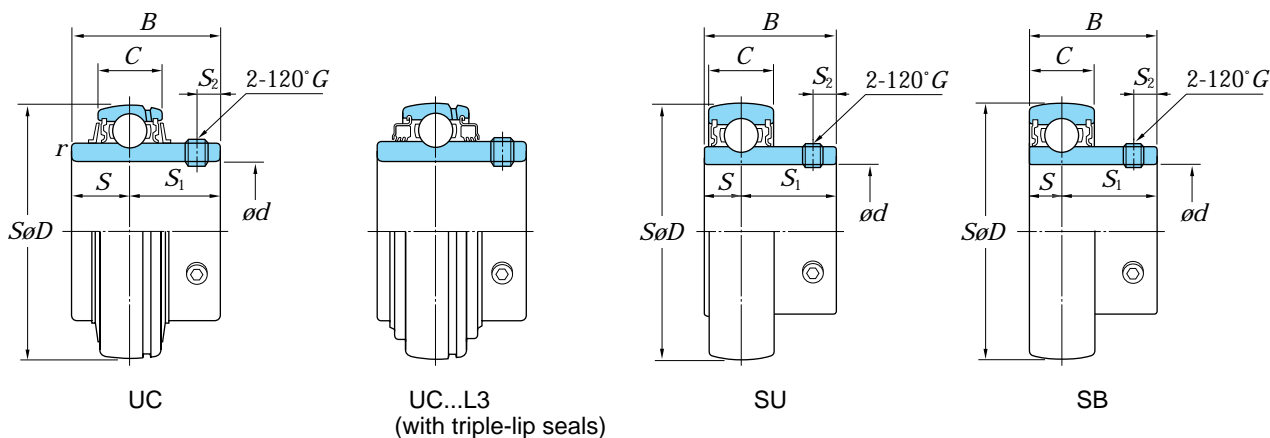

Asdiam. (mm) <i>d</i>	Asdiam. (inch) <i>d</i>	Afmetingen (mm)				Draggetallen (kN)		Type Nr.		Afmetingen (mm)			Borgschroef afmeting <i>G</i>	(Refer.) Gewicht (kg)
		<i>D</i>	<i>B</i>	<i>C</i>	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Met standaard seals	Met triple-lip seals	<i>S</i>	<i>S<sub>1</sub></i>	<i>S<sub>2</sub></i>		
10		26	15	8	–	4.55	1.95	SU000	–	5	10	3	M3 X 0.35	0.024
12		28	15	8	–	5.10	2.40	SU001	–	5	10	3	M3 X 0.35	0.026
		40	22	12	–	9.55	4.80	SB201	–	6	16	4	M5 X 0.5	0.10
		47	31	16	0.6	12.8	6.65	UC201	UC201L2	12.7	18.3	5	M6 X 0.75	0.21
12.70	1/2	47	31	16	0.6	12.8	6.65	UC201-08		12.7	18.3	5	1/4-28 UNF	0.21
14.28	9/16	47	31	16	0.6	12.8	6.65	UC202-09		12.7	18.3	5	1/4-28 UNF	0.20
15		32	16.5	9	–	5.60	2.85	SU002	–	5.5	11	3.3	M4 X 0.5	0.038
		40	22	12	–	9.55	4.80	SB202	–	6	16	4	M5 X 0.5	0.10
		47	31	16	0.6	12.8	6.65	UC202	UC202L2	12.7	18.3	5	M6 X 0.75	0.19
15.87	5/8	47	31	16	0.6	12.8	6.65	UC202-10		12.7	18.3	5	1/4-28 UNF	0.19
17		35	17.5	10	–	6.00	3.25	SU003	–	6	11.5	3.3	M4 X 0.5	0.050
		40	22	12	–	9.55	4.80	SB203	–	6	16	4	M5 X 0.5	0.10
		47	31	16	0.6	12.8	6.65	UC203	UC203L2	12.7	18.3	5	M6 X 0.75	0.18
17.46	11/16	47	31	16	0.6	12.8	6.65	UC203-11		12.7	18.3	5	1/4-28 UNF	0.17
19.05	3/4	47	31	16	0.6	12.8	6.65	UC204-12		12.7	18.3	5	1/4-28 UNF	0.16
20		42	21	12	–	9.40	5.05	SU004	–	7	14	4	M5 X 0.5	0.080
		47	25	14	–	12.8	6.65	SB204	–	7	18	5	M6 X 0.75	0.15
		47	31	16	1	12.8	6.65	UC204	UC204L2	12.7	18.3	5	M6 X 0.75	0.16
20.64	13/16	52	34.1	17	1	14.0	7.85	UC205-13		14.3	19.8	5.5	1/4-28 UNF	0.24
22.23	7/8	52	34.1	17	1	14.0	7.85	UC205-14		14.3	19.8	5.5	1/4-28 UNF	0.23
		62	38.1	22	2	19.5	11.30	UC305-14		15	23	6	M6 X 0.75	0.48
23.81	15/16	52	34.1	17	1	14.0	7.85	UC205-15		14.3	19.8	5.5	1/4-28 UNF	0.21
		62	38.1	19	1	19.5	11.30	UCX05-15		15.9	22.2	6	1/4-28 UNF	0.39
		62	38.1	22	1.1	19.5	11.30	UC305-15		15	23	6	M6 X 0.75	0.46
25		47	22	12	–	10.1	5.85	SU005	–	7	15	4.5	M5 X 0.5	0.10
		52	27	15	–	14.0	7.85	SB205	–	7.5	19.5	5.5	M6 X 0.75	0.18
		52	34.1	17	1	14.0	7.85	UC205	UC205L2	14.3	19.8	5.5	M6 X 0.75	0.20
		62	38.1	19	1	19.5	11.3	UCX05	UCX05L3	15.9	22.2	6	M6 X 0.75	0.39
		62	38	22	1.1	20.6	11.3	UC305	–	15	23	6	M6 X 0.75	0.45
25.40	1	52	34.1	17	1	14.0	7.85	UC205-16		14.3	19.8	5.5	1/4-28 UNF	0.20
		62	38.1	19	1	19.5	11.30	UCX05-16		15.9	22.2	6	1/4-28 UNF	0.38
		62	38.1	22	1.1	19.5	11.30	UC305-16		15	23	6	M6 X 0.75	0.44
26.98	1.1/16	62	38.1	19	1	19.5	11.30	UC206-17		15.9	22.2	6	1/4-28 UNF	0.36


Opmerking) Laggers van UC201L2 t/m UC205L2 zijn voorzien van een seal met dubbele lip (L2) i.v.m. de beschikbare ruimte.

# INSERTLAGERS



## Cilindrische boring (asborging d.m.v. borgschroeven)

**d 28.58 - 40 mm**

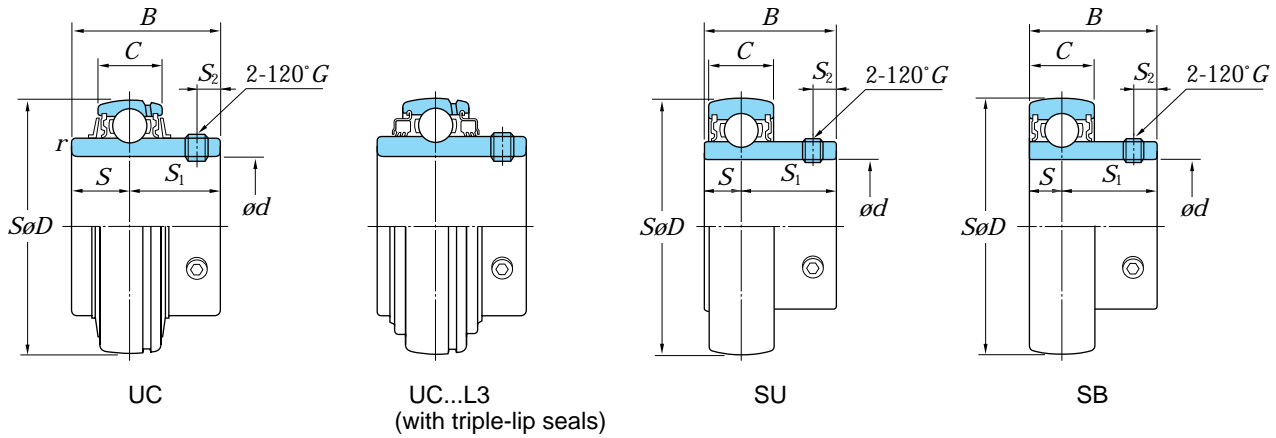


Asdiam. (mm)	Asdiam. (inch)	Afmetingen (mm)				Draggetallen (kN)		Type Nr.		Afmetingen (mm)			Borgschroef afmeting G	(Refer.) Gewicht (kg)
		D	B	C	r min.	C <sub>r</sub>	C <sub>0r</sub>	Met standaard seals	Met triple-lip seals	S	S <sub>1</sub>	S <sub>2</sub>		
28.58	1.1/8	62	38.1	19	1	19.5	11.30	<b>UC206-18</b>		15.9	22.2	6	1/4-28 UNF	0.34
		72	43	24	1.1	26.7	15.00	<b>UC306-18</b>		17	26	6	M6 X0.75	0.58
30		55	24.5	13	—	13.2	8.25	<b>SU006</b> —		7.5	17	5.5	M5 X0.5	0.15
		62	30	16	—	19.5	11.3	<b>SB206</b> —		8	22	6	M6 X0.75	0.27
		62	38.1	19	1	19.5	11.3	<b>UC206 UC206L3</b>		15.9	22.2	6	M6 X0.75	0.32
		72	42.9	20	1	25.7	15.4	<b>UCX06 UCX06L3</b>		17.5	25.4	6.5	M8 X1	0.58
		72	43	24	1.1	26.7	15.0	<b>UC306</b> —		17	26	6	M6 X0.75	0.56
30.16	1.3/16	62	38.1	19	1	19.5	11.3	<b>UC206-19</b>		15.9	22.2	6	1/4-28 UNF	0.32
		72	42.9	20	1	25.7	15.4	<b>UCX06-19</b>		17.5	25.4	6.5	5/16-24 UNF	0.58
		72	42.9	24	1.1	26.7	15.0	<b>UC306-19</b>		17	26	6	M6 X0.75	0.56
31.75	1.1/4	72	42.9	20	1.1	25.7	15.4	<b>UC207-20</b>		17.5	25.4	6.5	5/16-24 UNF	0.54
		72	42.9	20	1	25.7	15.4	<b>UCX06-20</b>		17.5	25.4	6.5	5/16-24 UNF	0.55
		80	48	26	1.5	33.4	19.3	<b>UC307-20</b>		19	29	8	M8 X1	0.77
33.34	1.5/16	72	42.9	20	1.1	25.7	15.4	<b>UC207-21</b>		17.5	25.4	6.5	5/16-24 UNF	0.51
		80	48	26	1.5	33.4	19.3	<b>UC307-21</b>		19	29	8	M8 X1	0.74
34.93	1.3/8	72	42.9	20	1.1	25.7	15.4	<b>UC207-22</b>		17.5	25.4	6.5	5/16-24 UNF	0.48
		80	49.2	21	1.1	29.1	17.8	<b>UCX07-22</b>		19	30.2	8	5/16-24 UNF	0.75
		80	48	26	1.5	33.4	19.3	<b>UC307-22</b>		19	29	8	M8 X1	0.71
35		72	32	17	—	25.7	15.4	<b>SB207</b> —		8.5	23.5	6	M6 X0.75	0.42
		72	42.9	20	1.1	25.7	15.4	<b>UC207 UC207L3</b>		17.5	25.4	6.5	M8 X1	0.48
		80	49.2	21	1.1	29.1	17.8	<b>UCX07 UCX07L3</b>		19	30.2	8	M8 X1	0.75
		80	48	26	1.5	33.4	19.3	<b>UC307 UC307L3</b>		19	29	8	M8 X1	0.71
36.51	1.7/16	72	42.9	20	1.1	25.7	15.4	<b>UC207-23</b>		17.5	25.4	6.5	5/16-24 UNF	0.45
		80	49.2	21	1.1	29.1	17.8	<b>UCX07-23</b>		19	30.2	8	5/16-24 UNF	0.72
		80	48	26	1.5	33.4	19.3	<b>UC307-23</b>		19	29	8	M8 X1	0.68
38.1	1.1/2	80	49.2	21	1.1	29.1	17.8	<b>UC208-24</b>		17.5	25.4	6.5	5/16-24 UNF	0.68
		85	49.2	22	1.1	32.7	20.3	<b>UCX08-24</b>		19	30.2	8	5/16-24 UNF	0.87
		90	52	28	1.5	40.7	24.0	<b>UC308-24</b>		19	33	10	M10X1.25	1.05
39.69	1.9/16	80	49.2	21	1.1	29.1	17.8	<b>UC208-25</b>		17.5	25.4	6.5	5/16-24 UNF	0.65
		90	52	28	1.5	40.7	24.0	<b>UC308-25</b>		19	33	10	M10X1.25	1.01
40		80	34	18	—	29.1	17.8	<b>SB208</b> —		9	25	8	M8 X1	0.60
		80	49.2	21	1.1	29.1	17.8	<b>UC208 UC208L3</b>		19	30.2	8	M8 X1	0.64
		85	49.2	22	1.1	32.7	20.3	<b>UCX08 UCX08L3</b>		19	30.2	8	M8 X1	0.83
		90	51.6	24	1.1	35.1	23.3	<b>UCX09/1d</b>		19	32.6	9	M10X1.25	1.10
		90	52	28	1.5	40.7	24.0	<b>UC308 UC308L3</b>		19	33	10	M10X1.25	1.00

# INSERTLAGERS



## Cilindrische boring (asborging d.m.v. borgschroeven)

**d 41.28 - 57.15 mm**

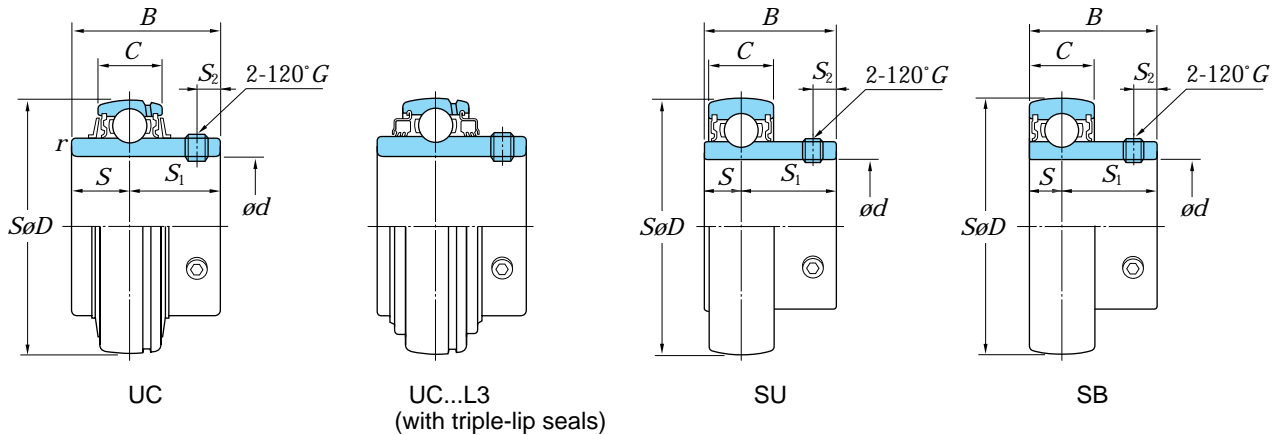


Asdiam. (mm)	Asdiam. (inch)	Afmetingen (mm)				Draggetallen (kN)		Type Nr.		Afmetingen (mm)			Borgschroef afmeting G	(Refer.) Gewicht (kg)
		D	B	C	r min.	C <sub>r</sub>	C <sub>0r</sub>	Met standaard seals	Met triple-lip seals	S	S <sub>1</sub>	S <sub>2</sub>		
41.28	1.5/8	85	49.2	22	1.1	32.7	20.3	UC209-26	UC309-26	19	30.2	8	5/16-24 UNF	0.78
		100	57	30	1.5	48.9	29.5			22	35	10	M10X1.25	1.44
42.86	1.11/16	85	49.2	22	1.1	32.7	20.3	UC209-27	UCX09-27	19	30.2	8	5/16-24 UNF	0.74
		90	51.6	24	1.1	35.1	23.3			19	32.6	9	3/8-24 UNF	1.01
		100	57	30	1.5	48.9	29.5			22	35	10	M10X1.25	1.40
44.45	1.3/4	85	49.2	22	1.1	32.7	20.3	UC209-28	UCX09-28	19	30.2	8	5/16-24 UNF	0.70
		90	51.6	24	1.1	35.1	23.3			19	32.6	9	3/8-24 UNF	0.97
		100	57	30	1.5	48.9	29.5			22	35	10	M10X1.25	1.35
45		85	49.2	22	1.1	32.7	20.3	UC209	UC209L3	19	30.2	8	M8 X1	0.68
		90	51.6	24	1.1	35.1	23.3			19	32.6	9	M10X1.25	0.95
		100	57	30	1.5	48.9	29.5			22	35	10	M10X1.25	1.33
46.04	1.13/16	90	51.6	24	1.1	35.1	23.3	UC210-29		19	32.6	9	3/8-24 UNF	0.91
47.63	1.7/8	90	51.6	24	1.1	35.1	23.3	UC210-30		19	32.6	9	3/8-24 UNF	0.87
		110	61	32	2	62.0	38.3	UC310-30		22	39	12	M12X1.5	1.84
49.21	1.15/16	90	51.6	24	1.1	35.1	23.3	UC210-31		19	32.6	9	3/8-24 UNF	0.82
		100	55.6	25	1.1	43.4	29.4	UCX10-31		22.2	33.4	9	3/8-24 UNF	1.32
		110	61	32	2.0	62.0	38.3	UC310-31		22	39	12	M12X1.5	1.78
50		90	51.6	24	1.1	35.1	23.3	UC210	UC210L3	19	32.6	9	M10X1.25	0.80
		100	55.6	25	1.1	43.4	29.4			22.2	33.4	9	M10X1.25	1.29
		110	61	32	2	62.0	38.3			22	39	12	M12X1.5	1.69
50.8	2	100	55.6	25	1.5	43.4	29.4	UC211-32		22.2	33.4	9	3/8-24 UNF	1.26
		100	55.6	25	1.1	43.4	29.4	UCX10-32		22.2	33.4	9	3/8-24 UNF	1.26
		120	66	34	2	71.6	45.0	UC311-32		25	41	12	M12X1.5	2.08
52.39	2.1/16	100	55.6	25	1.5	43.4	29.4	UC211-33		22.2	33.4	9	3/8-24 UNF	1.18
53.98	2.1/8	100	55.6	25	1.5	43.4	29.4	UC211-34		22.2	33.4	9	3/8-24 UNF	1.15
		120	66	34	2	71.6	45.0	UC311-34		25	41	12	M12X1.5	1.95
55		100	55.6	25	1.5	43.4	29.4	UC211	UC211L3	22.2	33.4	9	M10X1.25	1.11
		110	65.1	27	1.5	52.4	36.2			25.4	39.7	10.5	M10X1.25	1.80
		120	66	34	2	71.6	45.0			25	41	12	M12X1.5	1.90
50.56	2.3/16	100	55.6	25	1.5	43.4	29.4	UC211-35		22.2	33.4	9	3/8-24 UNF	1.09
		110	65.1	27	1.5	52.4	36.2	UCX11-35		25.4	39.7	10.5	3/8-24 UNF	1.78
		120	66	34	2	71.6	45.0	UC311-35		25	41	12	M12X1.5	1.87
57.15	2.1/4	110	65.1	27	1.5	52.4	36.2	UC212-36		25.4	39.7	10.5	3/8-24 UNF	1.67
		110	65.1	27	1.5	52.4	36.2	UCX11-36		25.4	39.7	10.5	3/8-24 UNF	1.70
		130	71	36	2.1	81.9	52.2	UC312-36		26	45	12	M12X1.5	2.84

# INSERTLAGERS



## Cilindrische boring (asborging d.m.v. borgschroeven)

**d 58.74 - 76.2 mm**

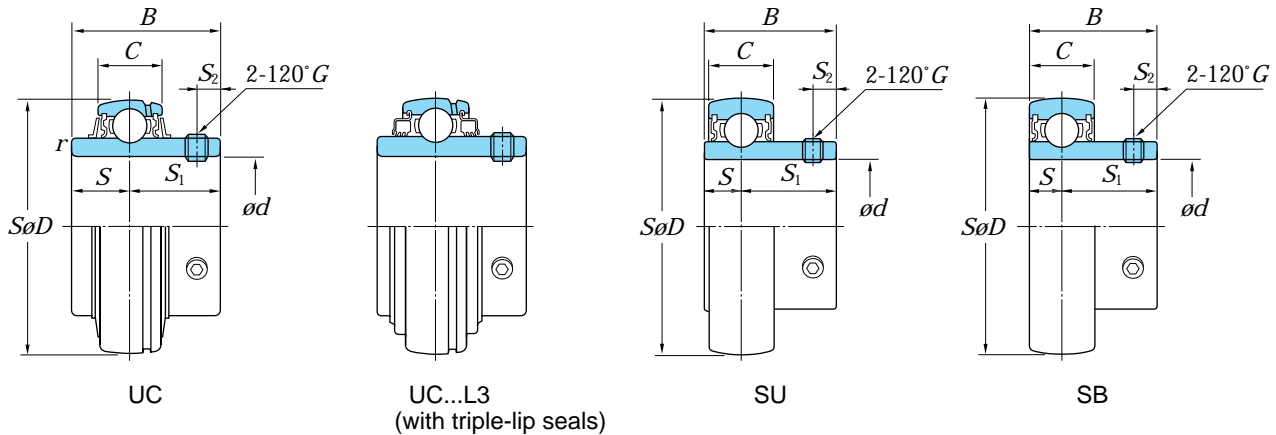


Asdiam. (mm) <i>d</i>	Asdiam. (inch) <i>d</i>	Afmetingen (mm)				Draggetallen (kN)		Type Nr.		Afmetingen (mm)			Borgschroef afmeting <i>G</i>	(Refer.) Gewicht (kg)
		<i>D</i>	<i>B</i>	<i>C</i>	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Met standaard seals	Met triple-lip seals	<i>S</i>	<i>S<sub>1</sub></i>	<i>S<sub>2</sub></i>		
58.74	2.5/16	110	65.1	27	1.5	52.4	36.2	UC212-37		25.4	39.7	10.5	3/8-24 UNF	1.67
		120	65.1	28	1.5	57.2	40.1	UC212	UC212L3	25.4	39.7	10.5	M10X1.25	1.52
		125	74.6	30	1.5	62.2	44.1	UCX12	UCX12L3	25.4	39.7	12	M12X1.5	2.05
		130	71	36	2.1	81.9	52.2	UCX13-1d	UC312L3	30.2	44.4	12	M12X1.5	2.54
60	2.3/8	110	65.1	27	1.5	52.4	36.2	UC212-38		25.4	39.7	10.5	3/8-24 UNF	1.52
		120	65.1	28	1.5	57.2	40.1	UCX12-38		25.4	39.7	12	1/2-20 UNF	2.03
		130	71	36	2.1	81.9	52.2	UC312-38		26	45	12	M12X1.5	2.68
		125	74.6	30	1.5	62.2	44.1	UC212-39		25.4	39.7	10.5	3/8-24 UNF	1.45
60.33	2.3/8	120	65.1	28	1.5	57.2	40.1	UCX12-39		25.4	39.7	12	1/2-20 UNF	1.95
		125	74.6	30	1.5	62.2	44.1	UCX13-39		30.2	44.4	12	1/2-20 UNF	2.43
		130	71	36	2.1	81.9	52.2	UC312-39		26	45	12	M12X1.5	2.60
		120	65.1	28	1.5	57.2	40.1	UC213-40		25.4	39.7	12	1/2-20 UNF	1.94
61.91	2.7/16	125	74.6	30	1.5	62.2	44.1	UCX13-40		30.2	44.4	12	1/2-20 UNF	2.40
		130	71	36	2.1	81.9	52.2	UC313-40		30	45	12	M12X1.5	3.43
		120	65.1	28	1.5	57.2	40.1	UC213	UC213L3	25.4	39.7	12	M12X1.5	1.86
		125	74.6	30	1.5	62.2	44.1	UCX13	UCX13L3	30.2	44.4	12	M12X1.5	2.27
63.5	2.1/2	130	77.8	32	1.5	67.4	48.2	UCX14-1d		33.3	44.5	12	M12X1.5	2.73
		140	75	38	2.1	92.7	59.9	UC313	UC313L3	30	45	12	M12X1.5	3.35
		125	74.6	30	1.5	62.2	44.1	UC214-43		30.2	44.4	12	1/2-20 UNF	2.07
		130	77.8	32	1.5	67.4	48.3	UCX14-43		33.3	44.5	12	1/2-20 UNF	2.53
65	2.3/4	125	74.6	30	1.5	62.2	44.1	UC214-44		30.2	44.4	12	1/2-20 UNF	2.06
		130	77.8	32	1.5	67.4	48.3	UCX14-44		33.3	44.5	12	1/2-20 UNF	2.49
		150	78	40	2.1	104	68.1	UC314-44		33	45	12	M12X1.5	3.96
		125	74.6	30	1.5	62.2	44.1	UC214	UC214L3	30.2	44.4	12	M12X1.5	2.05
68.26	2.11/16	130	77.8	32	1.5	67.4	48.3	UCX14	UCX14L3	33.3	44.5	12	M12X1.5	2.48
		150	78	40	2.1	104	68.1	UC314	UC314L3	33	45	12	M12X1.5	3.95
		130	77.8	32	1.5	67.4	48.3	UC215-46		33.3	44.5	12	1/2-20 UNF	2.25
		140	82.6	33	1.5	72.7	53.0	UC215-47		33.3	44.5	12	1/2-20 UNF	2.23
69.85	2.3/4	140	82.6	33	1.5	72.7	53.0	UCX15-47		33.3	49.3	14	1/2-20 UNF	3.06
		130	77.8	32	1.5	67.4	48.3	UC215	UC215L3	33.3	44.5	12	M12X1.5	2.21
		140	82.6	33	1.5	72.7	53.0	UCX15	UCX15L3	33.3	49.3	14	M12X1.5	3.05
		160	82	42	2.1	113	77.2	UC315	UC315L3	32	50	14	M14X1.5	4.33
70	3	130	77.8	32	1.5	67.4	48.3	UC215-48		33.3	44.5	12	1/2-20 UNF	2.12
		140	82.6	33	1.5	72.7	53.0	UCX15-48		33.3	49.3	14	1/2-20 UNF	2.95
		150	78	40	2.1	104	68.1	UC315-48		32	50	14	M14X1.5	4.24
		130	77.8	32	1.5	67.4	48.3							

# INSERTLAGERS

## Cilindrische boring (asboring d.m.v. borgschroeven)

**d 80 - 140 mm**

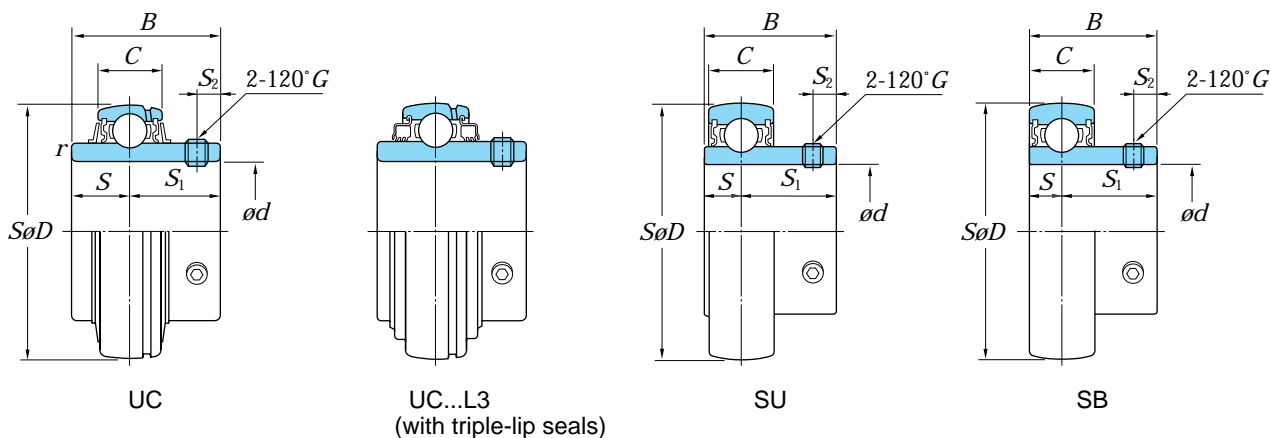

Asdiam. (mm) <i>d</i>	Asdiam. (inch) <i>d</i>	Afmetingen (mm)				Draggetallen (kN)		Type Nr.		Afmetingen (mm)			Borgschroef afmeting <i>G</i>	(Refer.) Gewicht (kg)
		<i>D</i>	<i>B</i>	<i>C</i>	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Met standaard seals	Met triple-lip seals	<i>S</i>	<i>S<sub>1</sub></i>	<i>S<sub>2</sub></i>		
80		140	82.6	33	2	72.7	53.0	<b>UC216</b>	<b>UC216L3</b>	33.3	49.3	14	M12X1.5	2.79
		150	85.7	35	2	84.0	61.9	<b>UCX16</b>	<b>UCX16L3</b>	34.1	51.6	14	M12X1.5	3.70
		170	86	44	2.1	123	86.7	<b>UC316</b>	<b>UC316L3</b>	34	52	14	M14X1.5	5.58
82.55	3.1/4	150	85.7	35	2	84.0	61.9	<b>UC217-52</b>		34.1	51.6	14	1/2-20 UNF	3.66
		180	96	46	3	133	96.8	<b>UC317-52</b>		40	56	16	M16X1.5	7.08
85		150	85.7	35	2	84.0	61.9	<b>UC217</b>	<b>UC217L3</b>	34.1	51.6	14	M12X1.5	3.45
		160	96	38	2	96.1	71.5	<b>UCX17</b>	<b>UCX17L3</b>	39.7	56.3	15	M12X1.5	4.56
		180	96	46	3	133	96.8	<b>UC317</b>	<b>UC317L3</b>	40	56	16	M16X1.5	6.85
87.31	3.7/16	160	96	38	2	96.1	71.5	<b>UCX17-55</b>		39.7	56.3	15	1/2-20 UNF	4.31
88.9	3.1/2	160	96	38	2	96.1	71.5	<b>UC218-56</b>		39.7	56.3	15	1/2-20 UNF	4.46
		160	96	38	2	96.1	71.5	<b>UCX17-56</b>		39.7	56.3	15	1/2-20 UNF	4.18
		170	104	40	2	109	81.9	<b>UCX18-56</b>		42.9	61.1	16	1/2-20 UNF	6.12
		190	96	48	3	143	107	<b>UC318-56</b>		40	56	16	M16X1.5	8.03
90		160	96	38	2	96.1	71.5	<b>UC218</b>	<b>UC218L3</b>	39.7	56.3	15	M12X1.5	4.35
		160	96	38	2	96.1	71.5	<b>UCX17-1d</b>		39.7	56.3	15	M12X1.5	4.04
		170	104	40	2	109	81.9	<b>UCX18</b>		42.9	61.1	16	M14X1.5	6.00
		190	96	48	3	143	107	<b>UC318</b>	<b>UC318L3</b>	40	56	16	M16X1.5	7.89
95		200	103	50	3	153	119	<b>UC319</b>	<b>UC319L3</b>	41	62	18	M16X1.5	8.89
95.25	3.3/4	200	103	50	3	153	119	<b>UC319-60</b>		41	62	18	M16X1.5	8.89
100		190	117.5	43	2.1	133	105	<b>UCX20</b>		49.2	68.3	18	M16X1.5	8.56
		215	108	54	3	173	141	<b>UC320</b>	<b>UC320L3</b>	42	66	20	M18X1.5	11.20
100.01	3.15/16	190	117.5	43	2.1	133	105	<b>UCX20-63</b>		49.2	68.3	18	1/2-20 UNF	8.40
101.6	4	190	117.5	43	2.1	133	105	<b>UCX20-64</b>		49.2	68.3	18	1/2-20 UNF	8.33
		215	108	54	3	173	141	<b>UC320-64</b>		42	66	20	M18X1.5	11.00
105		225	112	56	3	184	153	<b>UC321</b>		44	68	20	M18X1.5	12.70
110		240	117	60	3	205	180	<b>UC322</b>	<b>UC322L3</b>	46	71	20	M18X1.5	15.10
112.71	4.7/16	240	117	60	3	205	180	<b>UC322-71</b>		46	71	20	M18X1.5	14.70
120		260	126	64	3	207	185	<b>UC324</b>	<b>UC324L3</b>	51	75	20	M18X1.5	19.00
125.41	4.15/16	260	126	64	3	207	185	<b>UC324-79</b>		51	75	20	M18X1.5	18.00
130		280	135	68	4	229	214	<b>UC326</b>	<b>UC326L3</b>	54	81	20	M20X1.5	23.60
130.18	5.1/8	280	135	68	4	229	214	<b>UC326-82</b>		54	81	20	M20X1.5	23.20
139.7	5.1/2	300	145	72	4	253	246	<b>UC328-88</b>		59	86	20	M20X1.5	29.90
140		300	145	72	4	253	246	<b>UC326</b>	<b>UC326L3</b>	59	86	20	M20X1.5	29.80